

TUBO

IN-LINE FANS

Features



- o Duct mounting
- o Easy maintenance
- o Low noise impeller
- o Continuous operation
- o Ball bearing motor
- o 5 year warranty



Air flow:
up to 295 m³/h
82 l/s



Power:
from 14 W
SFP:
from 0.3 W/l/s



Noise level:
from 38 dBA




Options



Model	Tubo 100/125/150
Option	T
Timer	•

- o Turn-off delay adjustable from 2 to 30 min.

Overall dimensions and mounting


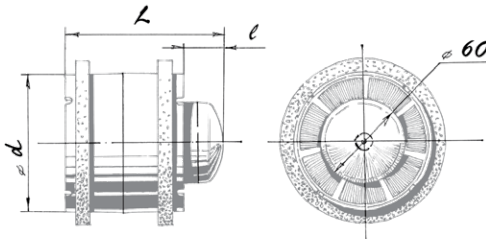


Dimensions [mm]	d	L	l
Tubo 100	99	120	28
Tubo 125	123.5	118	28
Tubo 150	149.5	128	28

Technical data

Model	Tubo 100	Tubo 125	Tubo 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	30
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	102 (28)	195 (54)	295 (82)
SFP [W/l/s]	0.5	0.3	0.37
Sound pressure level [dBA]*	38	39	40

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

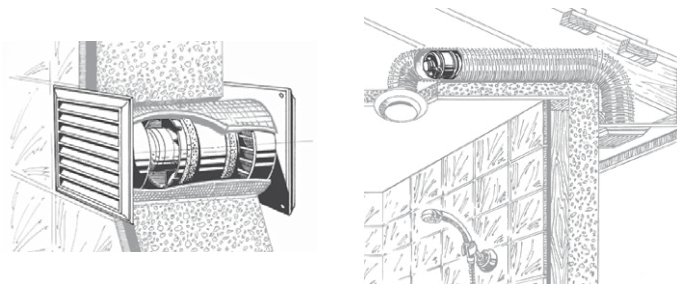

Fixing bracket

Fan with a mounting bracket for mounting to a horizontal or vertical surface.



Tubo-U

Designation key

Tubo	-U	125	T
Model	Mounting bracket	Spigot diameter	Option

Accessories

Air disc valves	Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
VPR, VSR, VMR	BlauPlast	BlauFlex	Decor, GM	SGS E1	MCD 60/0.3
					K, KZ